THEATER LED FLOOD
THEATER LED COLOUR FLOOD
CYC-200/CYC-200FC

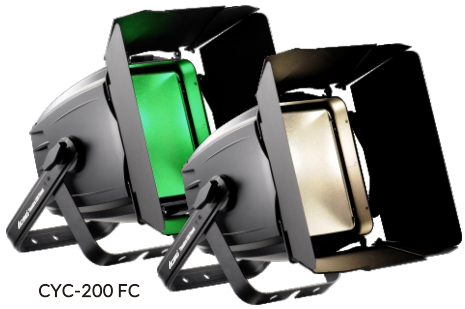

CYC-200 FC

CYC-200

Specifications

Light Source: 1x150W cool/warm white LED(CYC-200)
1x150W RGBW LED(CYC-200 FC)
Color Temperature: 3150±150K (CYC-200 WW)
5600±200K (CYC-200 CW)
2800~6000K (CYC-200 FC)
Beam Angle: 90°x113°

Optical

CRI: WW≥92, CW≥90
CQS: WW≥93, CW≥90
TLCI: WW≥96, CW≥96

Photometrics Diagram

(CYC-200)



(CYC-200FC)



Control

DMX Channel: 2/3 channels (CYC-200)
4/9 channels (CYC-200 FC)
Control Mode: DMX, Master/Slave
Firmware Upgrade: Update via DMX link

Construction

Display: LCD display
Data In/Out: 5-pin XLR
Power In/Out: PowerCon in/out
Protection Rating: IP20

Electrical and Physical

Power Voltage: AC 100~240V, 50/60Hz
Power Consumption: 180W (CYC-200)
155W (CYC-200 FC)
Dimensions(mm): 315x295x275mm,6.2Kg
Dimensions(in): 12.4"x11.6"x10.8"in,13.6lbs

Features

Can be used to render the back ground of a wall, a ceiling or the ground
4 dimming curves (linear, square rate, S-curve, anti-square rate); 0~100% smooth dimming; Various strobe speeds
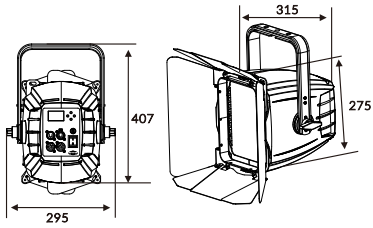
Dimensions(mm)