

ICARUS 620™

CM-620Z

FEATURES

- Color temperature range: 2500K-8000K
- Electronic linear zoom system
- Ring control, outstanding color macro effect
- 0-100% smooth dimming
- Variable strobe speeds

TECHNICAL SPECIFICATIONS

Specifications

- Light Source: 37 x 20 W RGBW LED
- Zoom Range: 10° - 60°
- Total lumen output: 14,067 lm

Control

- DMX Channel: 14/26/15 Channels
- Protocols: DMX, RDM
- Firmware Upgrade via DMX link

Pan/Tilt

- Pan/Tilt movement: 540° / 270°
- Pan/Tilt Resolution: 16-bit

Construction


- Display: LCD display
- Data In/Out: 3-pin and 5-pin XLR
- Power In/Out: Power Connector in/out
- Protection Rating: IP20

Electrical and Physical

- Input Voltage Range: 100-240V~ 50/60Hz
- Power Consumption: 610W
- Dimensions: 430 x 246 x 520mm (16.9" x 9.6" x 20.5")
- F/C Dimension: 665 x 600 x 775 mm (26.2" x 23.6" x 30.5")
- Weight: 19.5 kg (42.9 lbs)
- 79 kg (174.2 lbs)(Dual Loader Case)




PHOTOMETRICS DIAGRAM

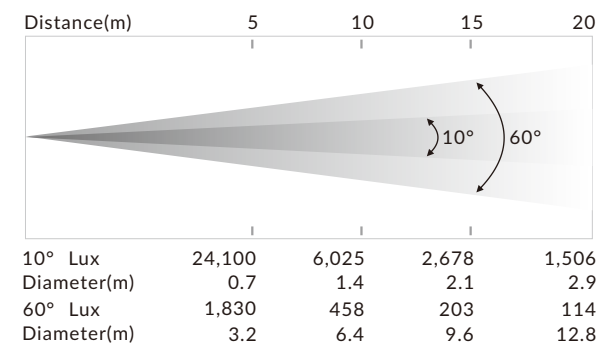


LIGHT QUALITY PARAMETER

CIE1931 CHROMATICITY COORDINATES(Big Angle)

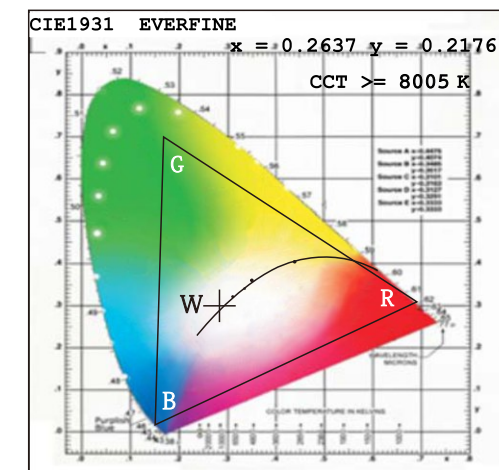

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

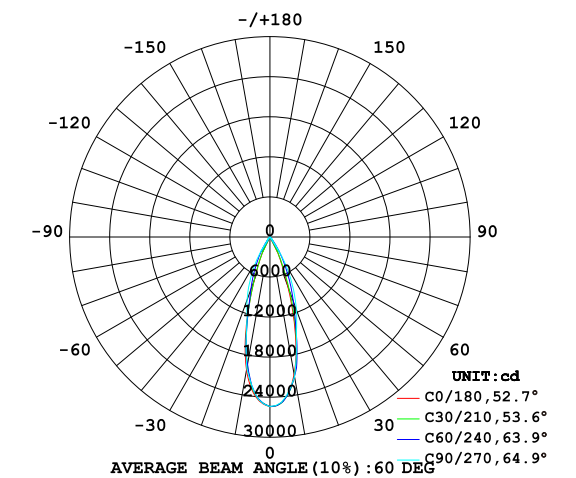

DIMENSIONS mm (in.)

