

ICARUS 320™

CM-320ZR

FEATURES

- Variable CTO: 2,500K - 8,000K
- Motorized linear zoom system, zoom range: 10°-60°
- Ring control, outstanding color macro effect
- Smooth dimming from 0-100%
- Outstanding strobe effect with variable speed

TECHNICAL SPECIFICATIONS

Specifications

- Light Source: 19 x 20 W RGBW LED
- Zoom Range: 10°-60°
- Total lumen output up to 5,000 lm

Control

- DMX Channel: 14/26/30 channels
- Protocols: DMX512
- Firmware Upgrade via DMX link

Pan/Tilt

- Pan/Tilt movement: 540° / 270°
- Pan/Tilt Resolution: 16-bit

Construction


- Display: LCD display
- Data In/Out: 3-pin and 5-pin XLR
- Power In/Out: Power Connector in/out
- Protection Rating: IP20

Electrical and Physical

- Input Voltage Range: 100-240V~ 50/60Hz
- Power Consumption: 255 W
- Dimensions: 310x183x393mm (12.2"x7.2"x15.4")
- F/C Dimension: 745 x 655 x 635 mm (29.3" x 25.8" x 25")
- Weight: 9 kg (19.8 lbs)
- 71.6 kg (157.9 lbs)(Quad Loader Case)




PHOTOMETRICS DIAGRAM

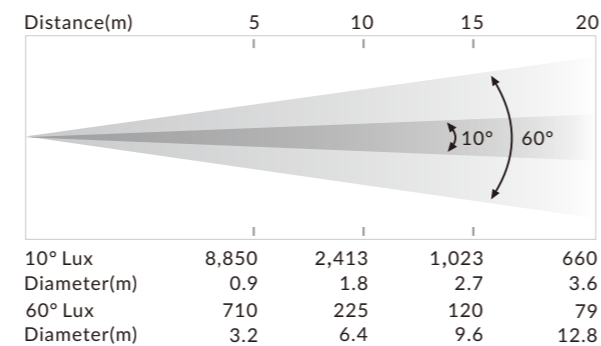


LIGHT QUALITY PARAMETER

CIE1931 CHROMATICITY COORDINATES(Big Angle)

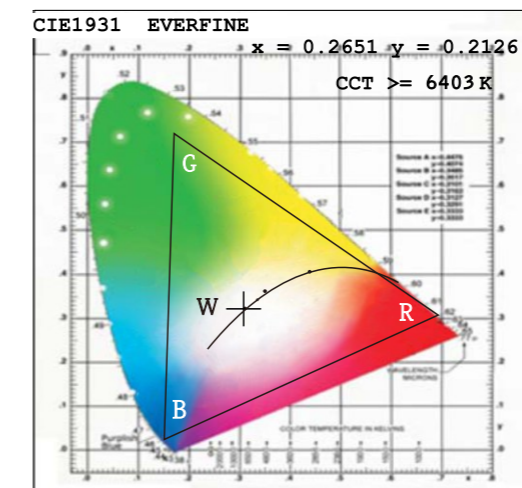

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

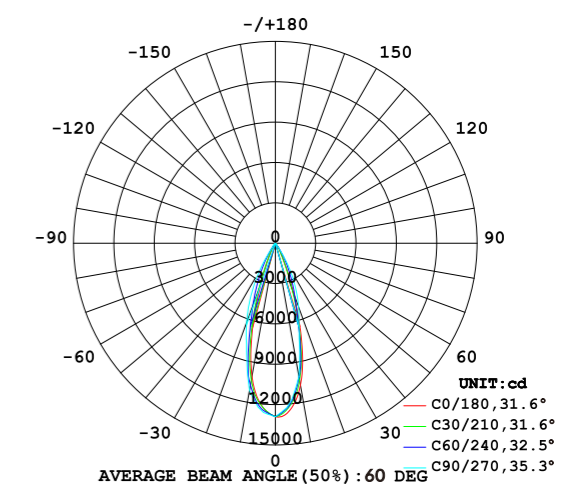

DIMENSIONS mm (in.)

