

VOLTKA

STORBE 1

FEATURES

- Compact in size, light in weight
- Individually Control Zones Up to 50 pcs
- Ultra-high stunning output with multiple speeding strobes

TECHNICAL SPECIFICATIONS

Specifications

- Light Source: 1,000 x 0.3W 5050 RGB SMD
- Beam Angle: 116°

Control

- DMX Channel: 5/12/35A/35B/150
- Control Mode: DMX512/RDM
- Firmware Upgrade via DMX link

Construction


- Display: OLED display
- Data In/Out: 3-pin or 5-pin XLR
- Power In/Out: Power Connector in/out
- Protection Rating: IP20

Electrical and Physical

- Power Voltage Range: 100-240V~ 50/60Hz
- Power Consumption: 275W
- Dimensions: 410 x 210 x 120mm(16.1" x 8.3" x 4.7")
410 x 253 x 120mm (16.1" x 10.0" x 4.7")(with hanger)
- Carton Dimension: 505 x 285 x 210mm(19.9" x 11.2" x 8.3")
- Weight: 4 kg(8.8 lbs)
4.9 kg(10.8 lbs)(One-pack per carton)




PHOTOMETRICS DIAGRAM

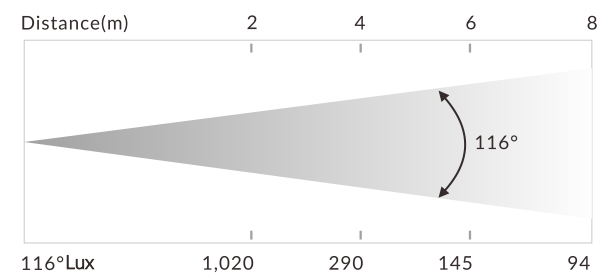


LIGHT QUALITY PARAMETER

CIE1931 CHROMATICITY COORDINATES

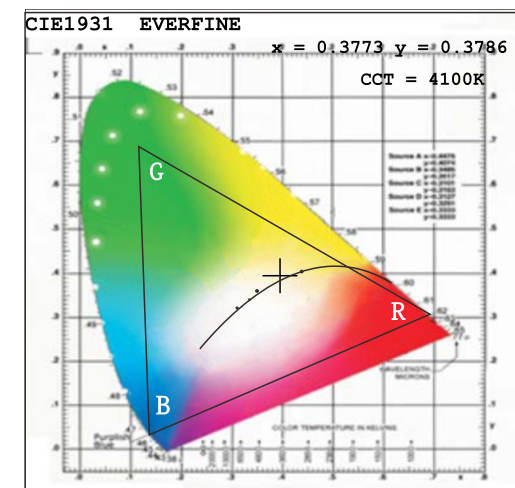

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

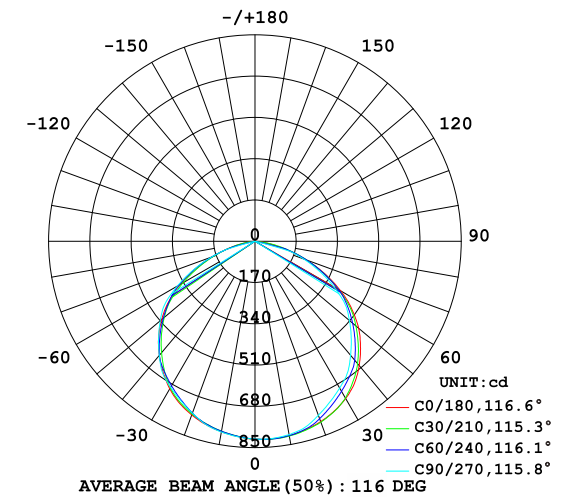

DIMENSIONS

