

# Super Dotline

TB 1060



Light Source

Beam Section: **10 x 60W RGBW LED**

Strobe Section: **96 x 3W CW LED**

**96 x 3W WW LED**

**96 x 0.5W RGB LED**

Beam Angle

**2.8°-31°**

Field Angle

**5°-46°**

Total Lumen Output of Fixture

**23,000 lumens**

Acme

Super Dotline



## Main Features

Sharp and saturated beam effects

Light Source:

Beam Section: 10 x 60W RGBW LED

Strobe Section: 96 x 3W CW LED

96 x 3W WW LED

96 x 0.5W RGB LED

Total Lumen Output of Fixture: 22,400 lumens

Motorized focus, fast and smooth


Beam Angle: 2.8°-31°

Field Angle: 5°-46°

Outstanding color mixing

Outstanding strobe effect with variable speed

## Technical Specifications

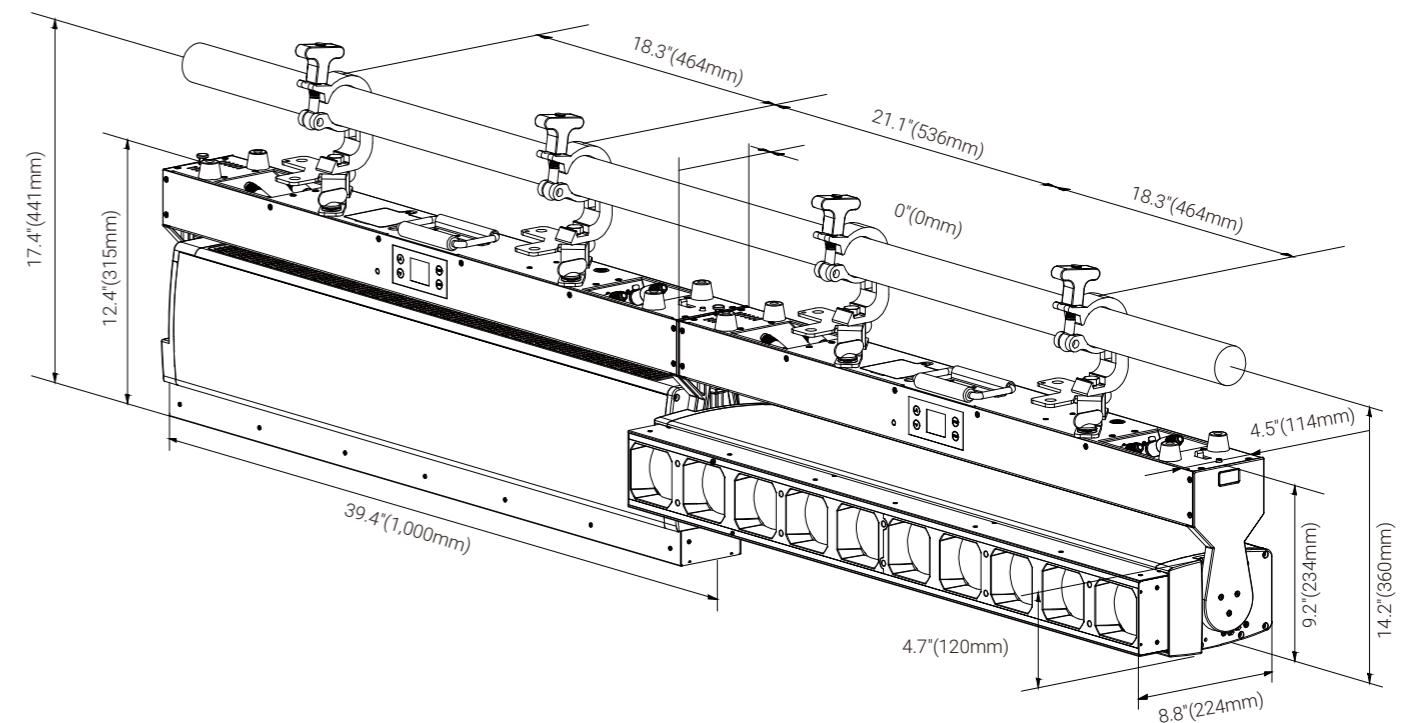

## Light Source

- Light Source:
  - Beam Section: 10 x 60W RGBW LED
  - Strobe Section:
    - 96 x 3W CW LED
    - 96 x 3W WW LED
    - 96 x 0.5W RGB LED
- Total Lumen Output of Fixture: 23,000 lumens
- Life Expectancy: 20,000 hours\* manufacturer specification

## Optical System

- Beam Angle: 2.8°-31° (Beam section)
- Field Angle: 5°-46° (Beam section)

## Other Effects

- Motorized focus, fast and smooth
- Outstanding color mixing
- Outstanding strobe effect with variable speed

## Pan & Tilt

- Tilt Movement: 202°
- Fixation: Tilt lock

## Control

- 4 touch button control panel
- Display: LCD Display
- Protocols: DMX512, RDM, Art-Net, sACN
- DMX Protocol Modes: 8
- Control Channels: 17/21/27/99/108/168/8+100/8+160
- Firmware Upgrade: Upgrade via DMX link or USB disk

## Electrical and Connectors

- Input Voltage Range: 180-240Vac; 50/60Hz
- Power Consumption: 1,155W
- Power In/Out: Power connector in/out (TRUE1 type)
- Data In/Out: 3-pin or 5-pin XLR , RJ45 connector

## Physical Information

- Fixture Dimensions:
  - 1,000 x 290 x 120 mm (39.4" x 11.4" x 4.7")
- Weight: 23.0 kg (50.7 lbs)

## Packing Information

- Flight case Dimensions:
  - 1,075 x 780 x 530 mm (42.3" x 30.7" x 20.9")
- Weight: 152.0 kg (335.1 lbs) (four-pack loader case)
- Carton Dimensions:
  - 1,200 x 400 x 245 mm (47.2" x 15.7" x 9.6")
- Weight: 27.0 kg (59.5 lbs) (one-pack loader carton)

## Work Environment

- Maximum Ambient Temperature: 40°C
- Minimum Operating Temperature: 0°C
- Maximum Surface Temperature: 65°C
- Protection Rating: IP20

## Installation

- Available in horizontal or vertical mounting
- Universal working position
- 2 omega brackets
- Safety cable attachment point

## Photometric (Images)

