


ANIMA W ANIMA C

PANEL 36 WW/ PANEL 36 RGB

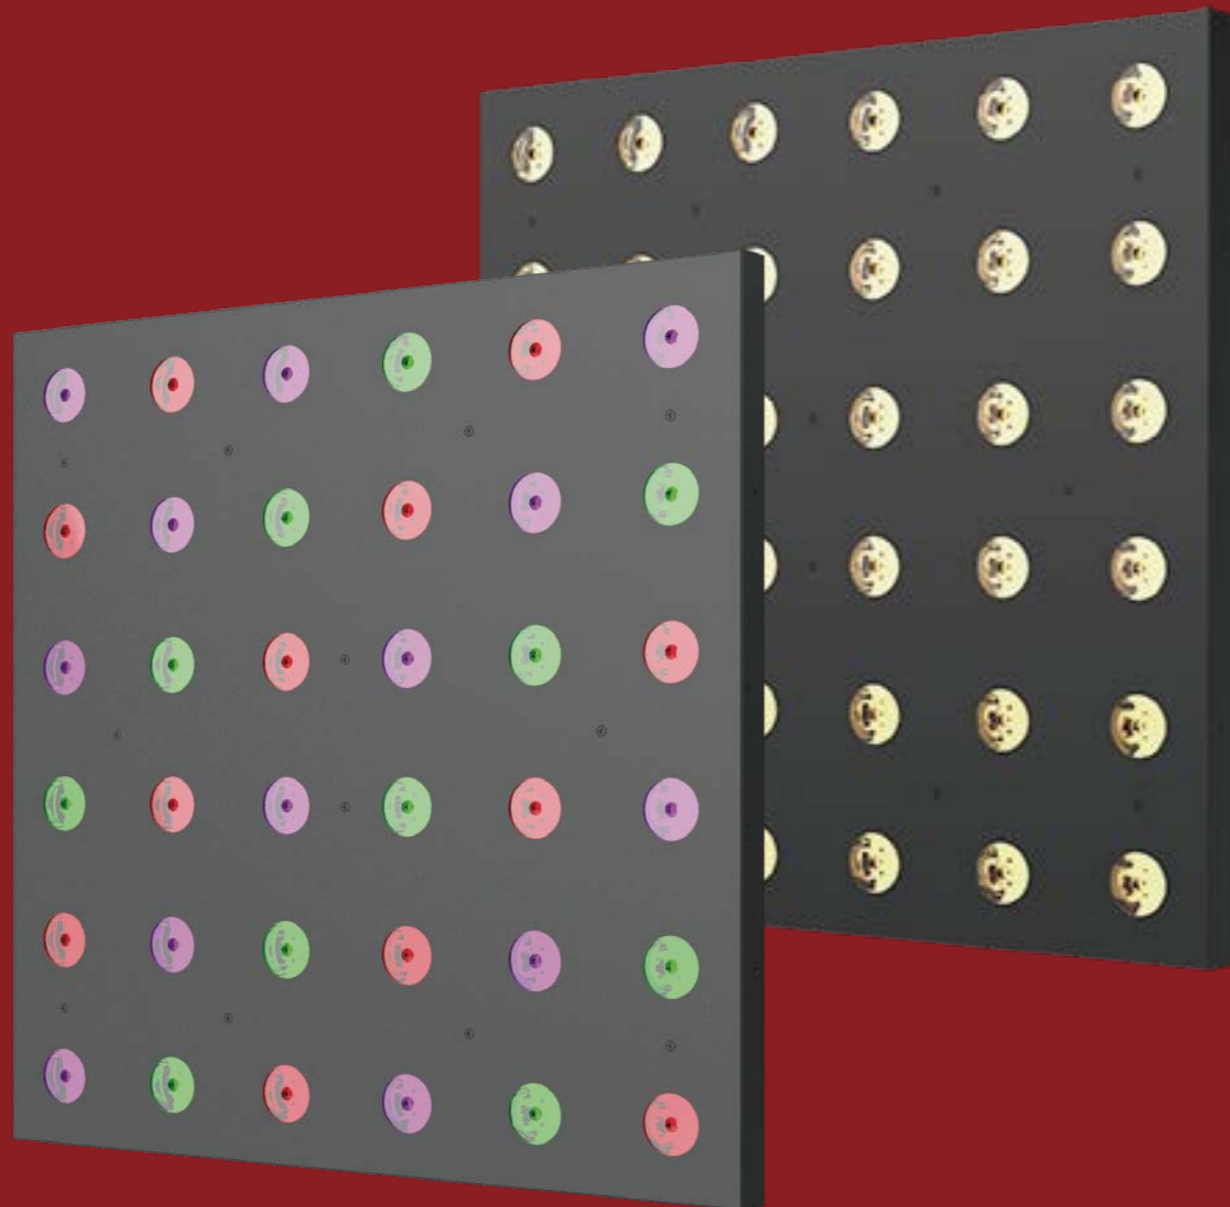

Light Source
36 x 3W WW LED
36 x 3W RGB LED

Lens Option
4°/8°/12°/25°/45°



Main Features

Light Source: 36 x 3W WW LED
36 x 3W RGB LED

LED can be controlled individually

Beam Angle: 4°/8°/12°/25°/45°


Outstanding strobe effect with variable speed

Small size, light weight

Smooth dimming 0-100%

Flicker free management

Technical Specifications

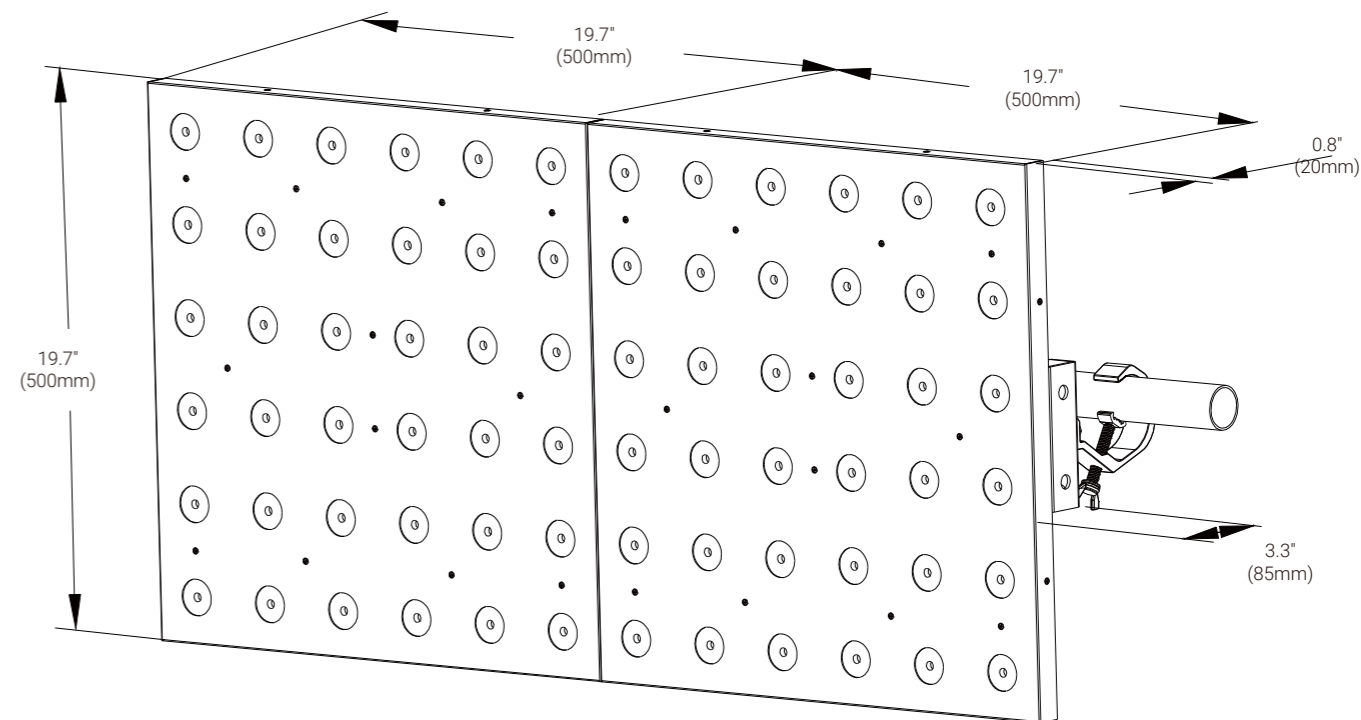

Light Source

- Light Source: 36 x 3W WW LED
36 x 3W RGB LED
- Total Lumen Output of Fixture:
2,800 lumens (RGB)
4,300 lumens (WW)
- Color Temperature Output of Fixture: 2,700K (WW)
- LED life expectancy: 20000 hours*

*Source manufacturer specification

Optical System

- Lens Option: 4°/8°/12°/25°/45°

Other Effects

- LED can be controlled individually
- Outstanding strobe effect with variable speed
- Smooth dimming 0-100%

Control

- 4 button touch control panel
- Display: OLED display
- Control Mode: DMX512, RDM
- DMX Protocol Modes: 3/11/15/108 (RGB)
36/40/42 (WW)
- Firmware Upgrade: Upgrade via DMX link

Electrical and Connectors

- Input Voltage Range: 100-240Vac; 50/60 Hz
- Power Consumption: 105W (RGB)
110W (WW)
- Power In/Out: Power connector in/out (TRUE1 type)
- Data In/Out: 3-pin or 5-pin XLR

Physical Information

- Fixture Dimensions:
500 x 500 x 85 mm (19.6" x 19.6" x 4.1")
- Weight: 9.3 kg (20.5 lbs)

Packing Information

- Carton Dimensions:
595 x 575 x 180 mm (23.4" x 22.6" x 7.1")
- Weight: 11.2 kg (24.7 lbs) (one-pack loader carton)


Work Environment

- Maximum Ambient Temperature: 40°C
- Minimum Operating Temperature: 0°C
- Maximum Surface Temperature: 65°C
- Protection Rating: IP20

Installation

- 1 or 2 clamps for 50mm truss can be installed on each connecting plate
- Safety cable attachment point

Connecting Diagram

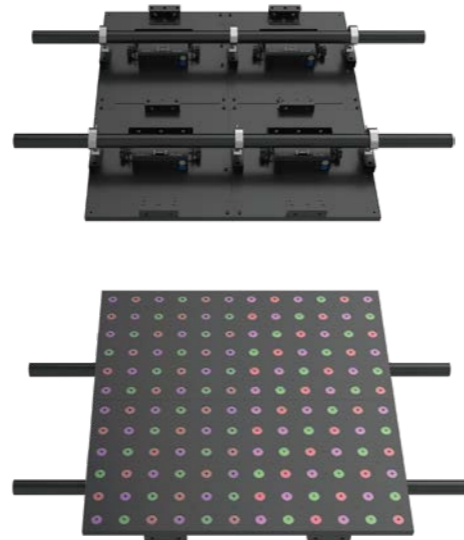

Photometric (Images)

