


MAGICIAN

WZ 100

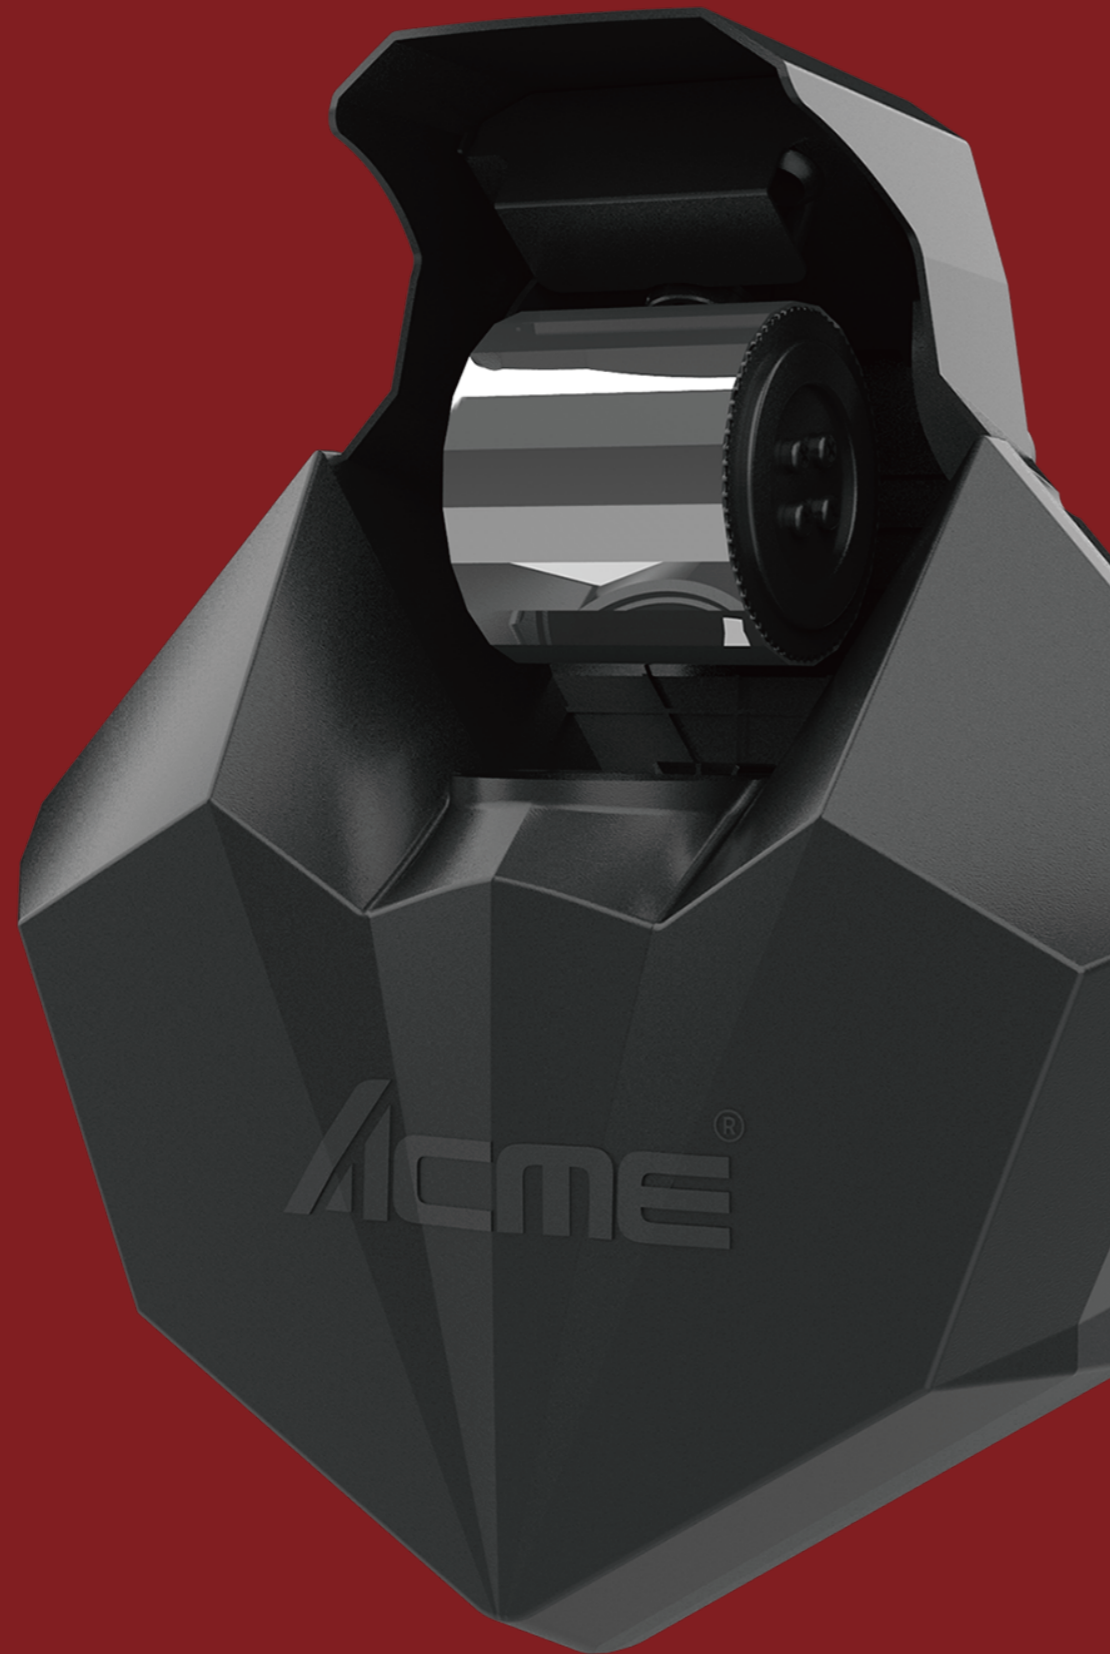

Light Source

1 x 80W LED

Beam Angle

3°

ACME

MAGICIAN



Main Features

LED engine comprised of 80W LED

Beam Angle : 3°

Color Temperature Output of Fixture: 7,500-8,000K

Compact design and light weight

Outstanding strobe effect with variable speed

Intelligent sound control, lighting effect changes with the music rhythm

Multiple built-in show modes

The rotating drum mechanism offers 110° horizontal and 90° vertical scanning


1 Static Gobo Wheel:

7 gobos (with fixed colors) + 1 effect gobo gobos, plus open

Optional reflector mirror module can create colorful effect with gobo wheel

Smooth dimming 0-100%

Technical Specifications

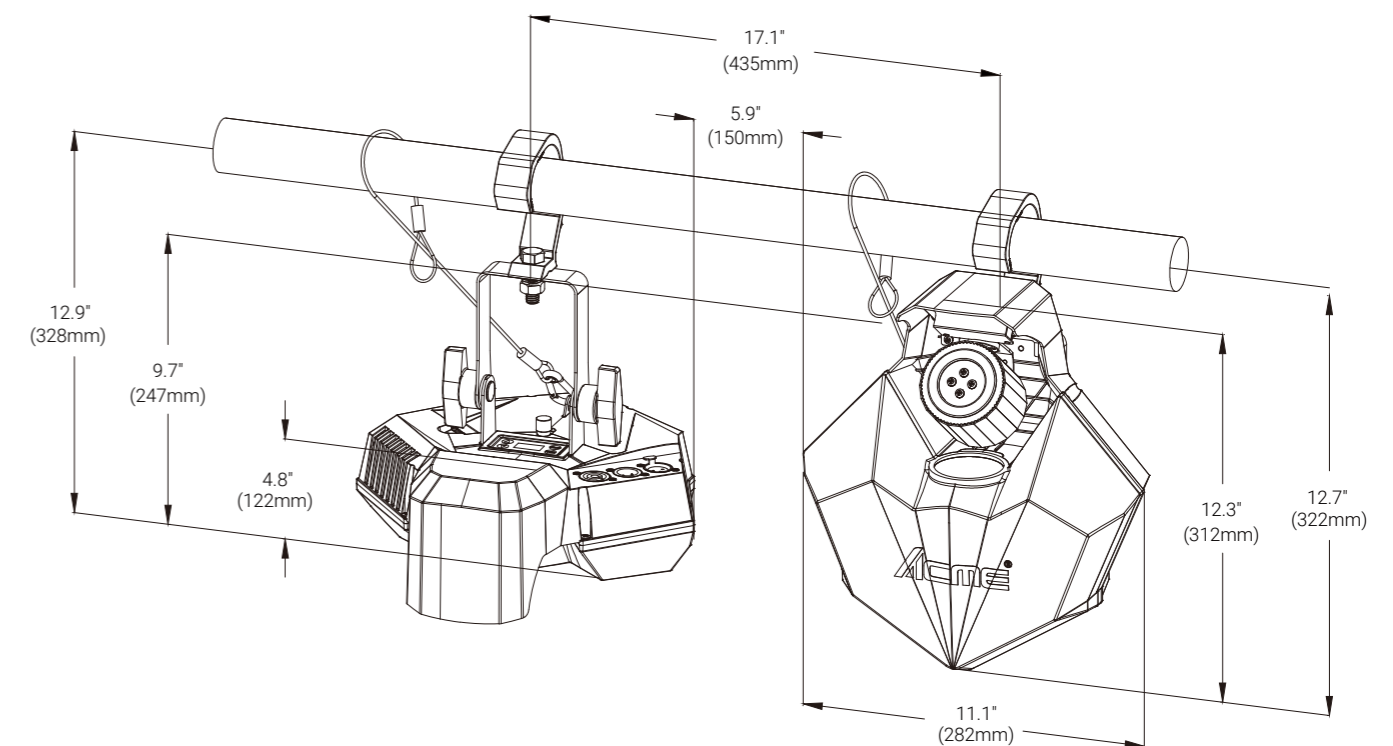

Light Source

- Light Source: 1 x 80W LED
- Color Temperature Output of Fixture: 7,500-8,000K
- Life Expectancy: 20,000 hours*


*Source manufacturer specification

Optical System

- Beam Angle : 3°

Gobos

- 1 Static Gobo Wheel:
7 gobos (with fixed colors) + 1 effect gobo gobos, plus open

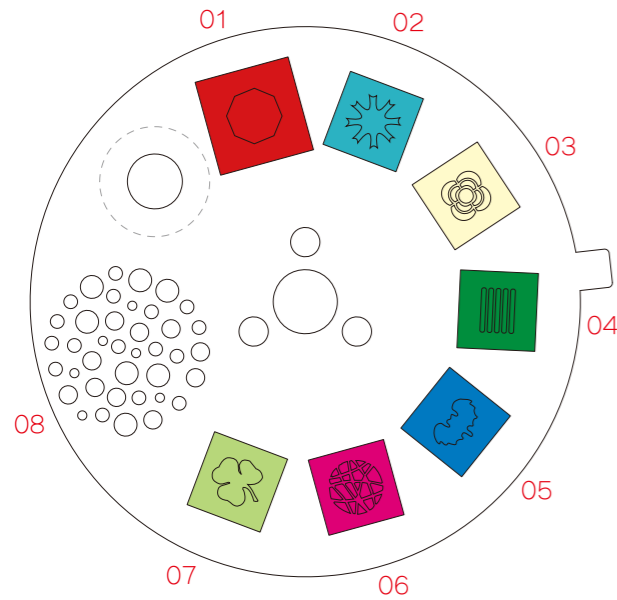

Static Gobo Wheel

Other Effects

- Outstanding strobe effect with variable speed
- Smooth dimming 0-100%
- Intelligent sound control, lighting effect changes with the music rhythm
- Multiple built-in show modes
- The rotating drum mechanism offers 110° horizontal and 90° vertical scanning

Pan & Tilt

- Pan Movement: 180°
- Tilt Movement : Infinite

Control

- 4 touch button control panel
- Display: OLED display
- Operational Modes: DMX Control, Show Mode, Sound Active
- Protocols: DMX512, RDM
- DMX Protocol Modes: 1
- Control Channels: 8
- Firmware Upgrade: Upgrade via DMX link

Electrical & Connectors

- Input Voltage Range: 100-240Vac; 50/60Hz
- Power Consumption: 90W
- Power In/Out: Power connector in
- Data In/Out: 3-pin or 5-pin XLR

Physical Information

- Fixture Dimensions:
282x 157 x 312 mm (11.1" x 6.2" x 12.3")
- Weight: 2.8 kg (6.2 lbs)

Packing Information

- Carton Dimensions:
395 x 365x 255 mm (15.6" x 14.3" x 10.0")
- Weight:
G.W.: 4 kg (8.8 lbs) (one-pack loader carton)

Work Environment

- Maximum Ambient Temperature: 40°C
- Minimum Operating Temperature: 0°C
- Maximum Surface Temperature: 65°C
- Protection Rating: IP20

Installation

- Horizontal or vertical mounting
- Universal working position
- Safety cable attachment point

Photometric (Images)

