PASODOBLE

PAR 12



Light Source

12 x 8W RGBW LED

Total Lumen Output of Fixture

2,815 lumens

Beam Angle

16°




Main Features

Light Source: 12 x 8W RGBW LED
Beam Angle: 16°
Field Angle: 27°
Total Lumen Output of Fixture: 2,815 lumens
Combine powerful beam and wash in one fixture

Outstanding color mixing effect
Compact design, small size
Outstanding strobe effect with variable speed
Smooth dimming 0-100%
Flicker free management

Technical Specifications

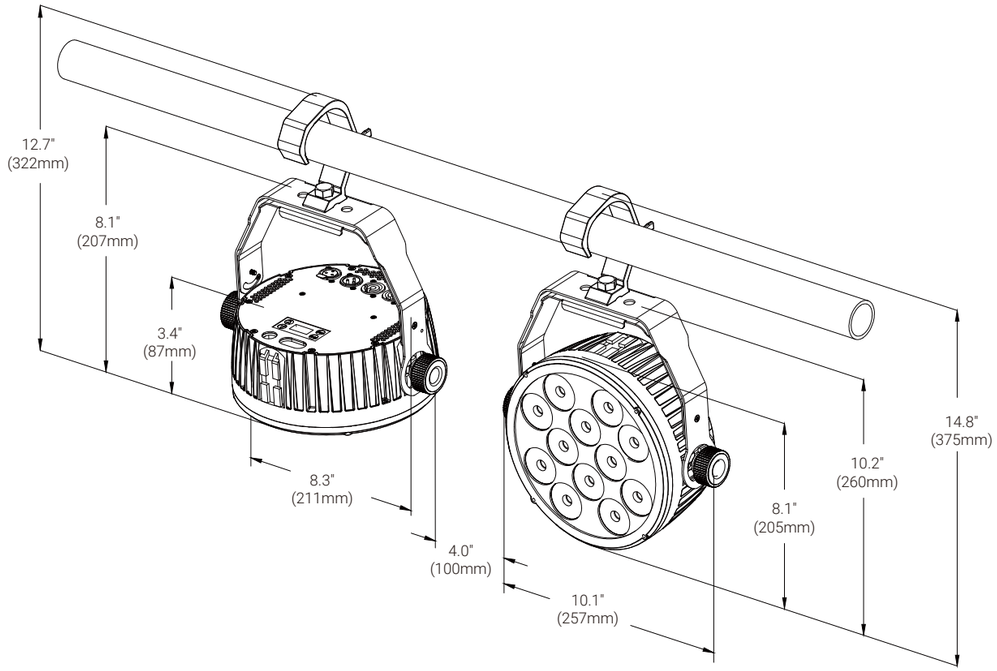

Light source

· Light Source: 12 x 8W RGBW LED
· Total Lumen Output of Fixture: 2,815 lumens
· Life Expectancy: 20,000 hours*

*Source manufacturer specification

Optical system

· Beam Angle: 16°
· Field Angle: 27°

Other Effects

· Outstanding color mixing effect
· Outstanding strobe effect with variable speed
· Smooth dimming 0-100%
· Flicker free management

Control

· 4 touch button control panel
· Display: OLED display
· Protocols: DMX512, RDM
· Firmware Upgrade: Upgrade via DMX link
· DMX Protocol Modes: 4
· Control Channels: 4/5/8/10

Electrical and Connectors

· Input Voltage Range: 100-240Vac; 50/60Hz
· Power Consumption: 85W
· Power In/Out: Power connector in/out (TRUE1 type)
· Data In/Out: 3-pin or 5-pin XLR

Physical Information

· Fixture Dimensions:
239 x 257 x 88 mm (9.4" x 10.1" x 3.5")
Weight: 3.0 kg (6.6 lbs)

Packing Information

· Carton Dimensions:
640 x 330 x 450 mm (25.2" x 13.0" x 17.7")
Weight: 23.5 kg (51.8 lbs) (one-pack loadr carton)

Work Environment


· Maximum Ambient Temperature: 40°C
· Minimum Operating Temperature: 0°C
· Maximum Surface Temperature: 65°C

Installation

· Horizontally or vertically mounting
· Universal working position
· The feet support with locking points
· Safety cable attachment point

PASODOBLE

Photometric (Images)

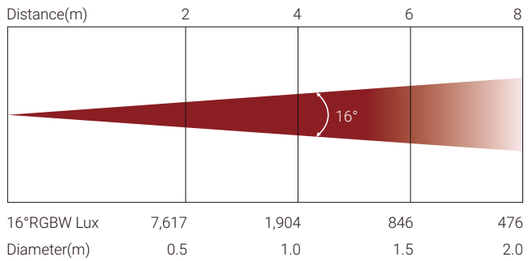

Specifications subject to change without notice.
19/10/2026

www.acmelighting.com PROJECT INSTALLATION