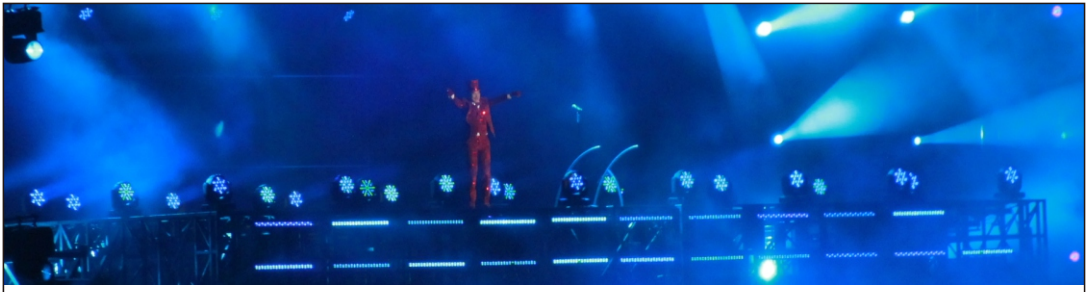

GLAMOUR 350Z
CM-350Z II

Control
DMX Channel: 11/14/15 Channels
Control Modes: DMX, wireless control (Optional)
Firmware Upgrade: Update via DMX link

Pan/Tilt
Pan/Tilt: 540°/ 225°
Pan/Tilt Resolution: 16 bit

Construction
Display: LCD Display
Data In/Out : 3-pin & 5-pin XLR
Power In/Out: PowerCon in/out
Protection Rating: IP20

Electrical and Physical
Power Voltage: AC100~240V, 50/60Hz
Power Consumption: 320W
Dimensions(mm): 310x183x412mm,11kg
Dimensions(in): 12.2"x7.2"x16.2"in, 24.2lbs

Photometrics Diagram



5°Lux	10500	2400	1111	590
Diameter(m)	0.42	0.85	1.3	1.74
50°Lux	300	96	48	29
Diameter(m)	4.6	9.4	13.9	18.6

Dimensions(mm)



Specifications
Light Sources: 7 x 40W RGBW LED
Zoom Range: 5°~50°
Luminous Flux: 2740lm

Features
Motorized liner zoom system
Zoom range: 5°~50 °
Outstanding color macro effect
Dimmer: 0~100% smooth dimming
Various strobe effects
Fast, quiet, flicker free operation