

GLORY FOLLOWSPOT II

XP-1000 FS



Light Source
**Osram Lot-it!
1000/PS Brilliant**

Zoom Range
5°-20°



GLORY FOLLOWSPOT II



Main Features

CRI > 90

7 independent color temperature filters
Zoom range: 5°-20°


Manual focus

Smooth dimming from 0-100%
5-100% iris
Tripod and color gel frame as standard

Flicker-free management

Dust-proof and oil-proof design

Technical Specifications

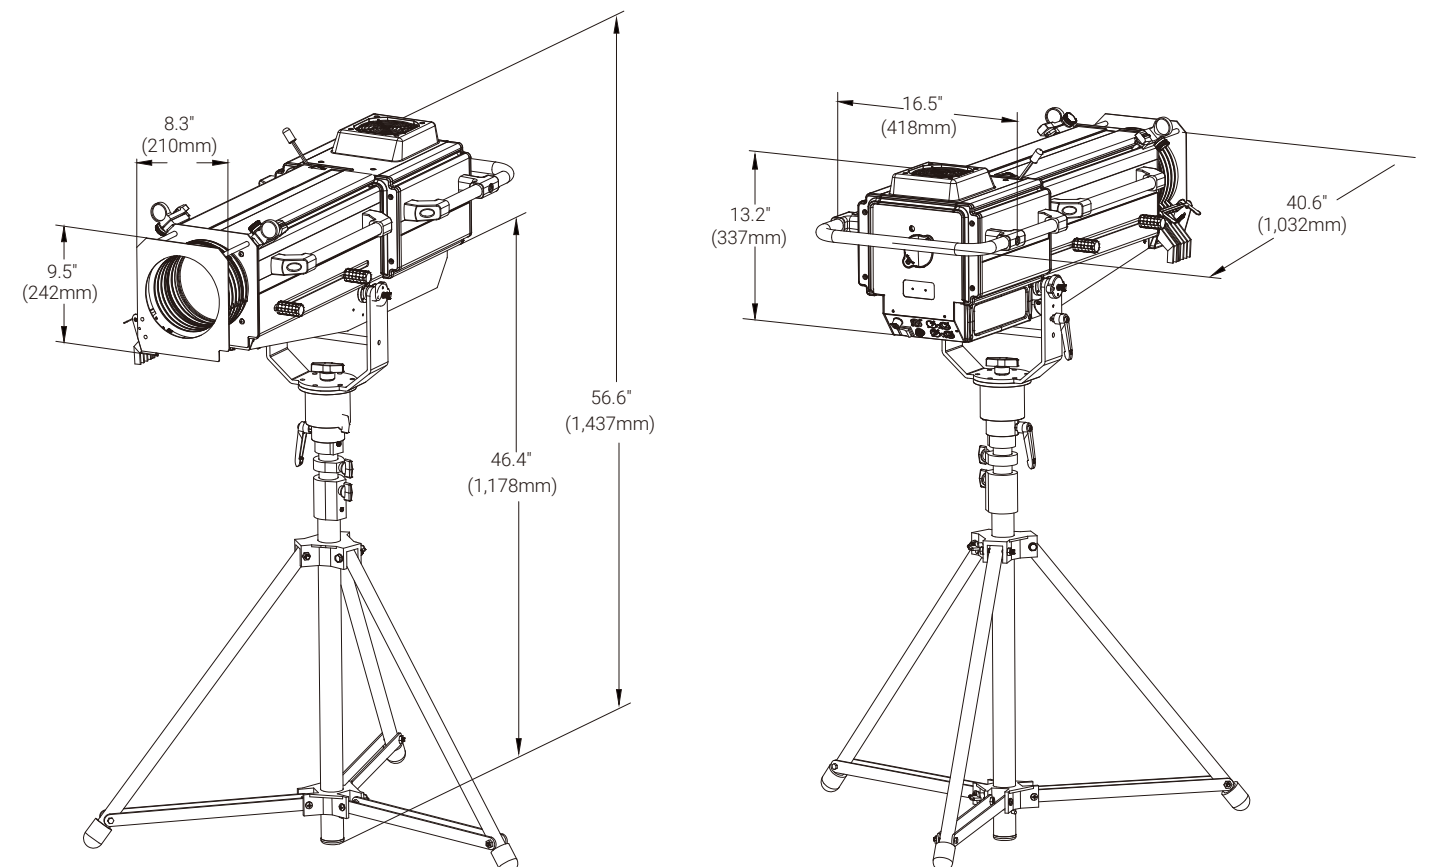

Light Source

- Light Source: Osram Lok-it! 1000/PS Brilliant
- Color Temperature Output of Fixture: 6,000K
- Life Expectancy: 750 hours*


*Source manufacturer specification

Optical System

- Advanced optical system to ensure clear, sharp image quality
- High-efficiency optical zoom (ratio 1:4)
- Zoom Range: 5°-20°

Colors

- 7 independent color temperature filters

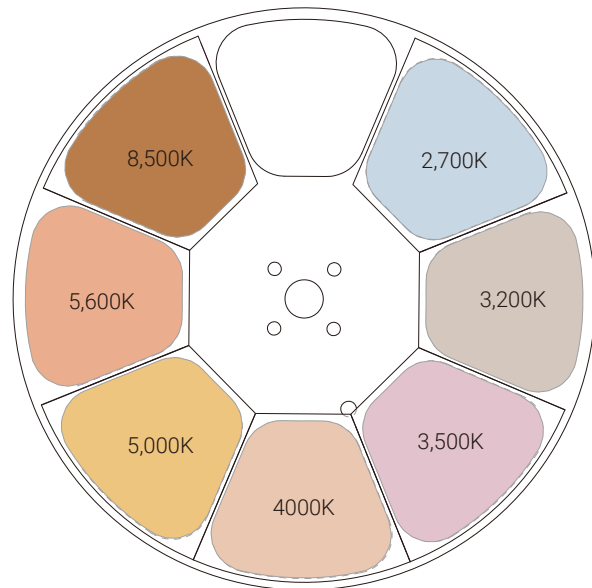

Color Temperature Wheel

Other Effects

- Smooth dimming from 0-100%
- 5-100% iris
- Tripod and color gel frame as standard
- Flicker-free management
- Dust-proof and oil-proof design



Linear Iris

Control

- 4-button touch panel
- Display: LCD display
- Electronic ballast

Electrical and Connectors

- Power supply with electronic auto-ranging
- Input voltage: 230Vac; 50/60Hz
- Power consumption: 1,181 W
- Power cord out

Physical Information

- Fixture Dimensions:
337 x 418 x 1,032 mm (13.2" x 16.5" x 40.6")
- Weight: 43.2 kg (95.2 lbs) excluding tripod;
60.0kg (132.2 lbs) including tripod

Packing Information

- Flight Case Dimensions:
1,195 x 600 x 790 mm (47.0" x 23.6" x 31.1")
- Weight: 119.6 kg (263.7 lbs) (Single Loader Case)


Work Environment

- Maximum ambient temperature: 40°C
- Minimum operating temperature: 0°C
- Maximum surface temperature: 65°C

Installation

- Horizontal mounting on tripod
- Universal working position
- Safety cable attachment point

Photometric (Images)

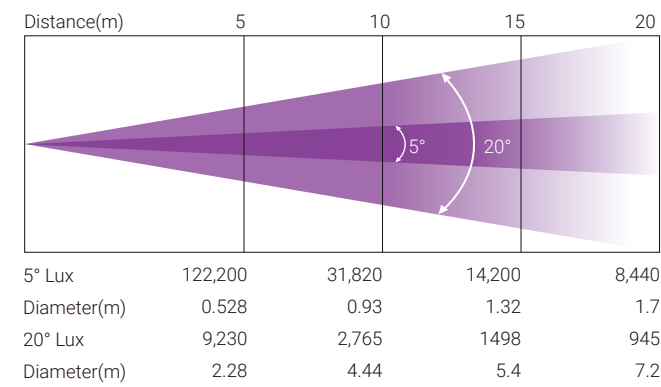

Specifications subject to change without notice.

11/28/2024